




SINGLE AND THREE PHASE EXTERNAL ROTOR RADIAL FANS

TYPE	VOLTS	CAP mF	AMPS	WATTS	RPM	L/S	PKG QTY	KG	VOL M ³
CRBB/4 - 400/188	240	10	1.6	370	1415	1110	1	8	0.059
CRBB/4 - 450/215	240	16	2.4	540	1360	1530	1	10	0.080
CRBB/4 - 500/241	240	40	4.7	1050	1340	2170	1	22	0.110
CRBB/6 - 500/241	240	10	1.4	320	815	1420	1	14	0.110
CRBT/4 - 500/241	415	N/A	1.9	1100	1350	2170	1	22	0.110
CRBT/4 - 560/267	415	N/A	3.0	1700	1240	2790	1	25	0.144
CRBT/6 - 630/300	415	N/A	1.9	960	875	2830	1	18	0.202
CRBT/4 - 630/300	415	N/A	5.9	3550	1300	4180	1	45	0.202
CRBT/6 - 710/327	415	N/A	5.0	2200	930	4380	1	52	0.270


- Airflow based on free blowing with inlet ring without scroll.
- Inlet rings available on request.
- Single phase capacitors supplied loose.
- Three phase feature Hi (Delta) and Lo (Star) speeds.

FAN DIMENSIONS

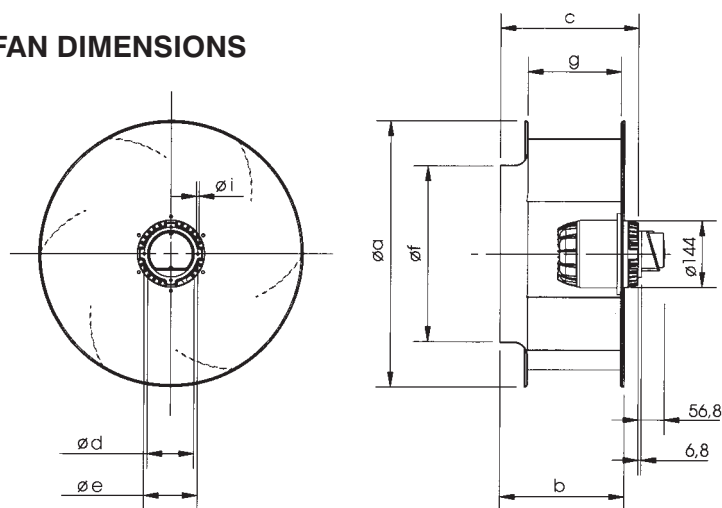

MODEL	A	B	C	D	E	F	G	H	I
4-400	404	188	206	100	115	266	140	144	M6
4-450	454	215	244	100	115	298	160	144	M6
4-500	504	241	270	140	162	335	180	186	M6
6-500	504	241	270	100	115	335	180	144	M10
4-560	570	267	296	140	162	375	200	186	M10
4-630	635	300	339	160	190	418	224	232	M12
6-630	635	300	339	140	162	418	224	186	M10
6-710	715	327	374	160	190	472	250	232	M12


INLET CONE DIMENSIONS

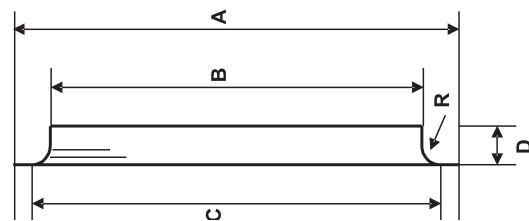

MODEL	A	B	C	D	R
RIC 315	294	194	234	40	20
RIC 355	326	226	266	40	20
RIC 400	358	258	298	40	20
RIC 450	385	285	325	40	20
RIC 500	425	325	365	45	20
RIC 560	435	355	405	45	20
RIC 630	485	405	445	45	20
RIC 710*	550	455	495	45	20



Ventiladores Radiales / Radial fans 133 - 710 mm Ø

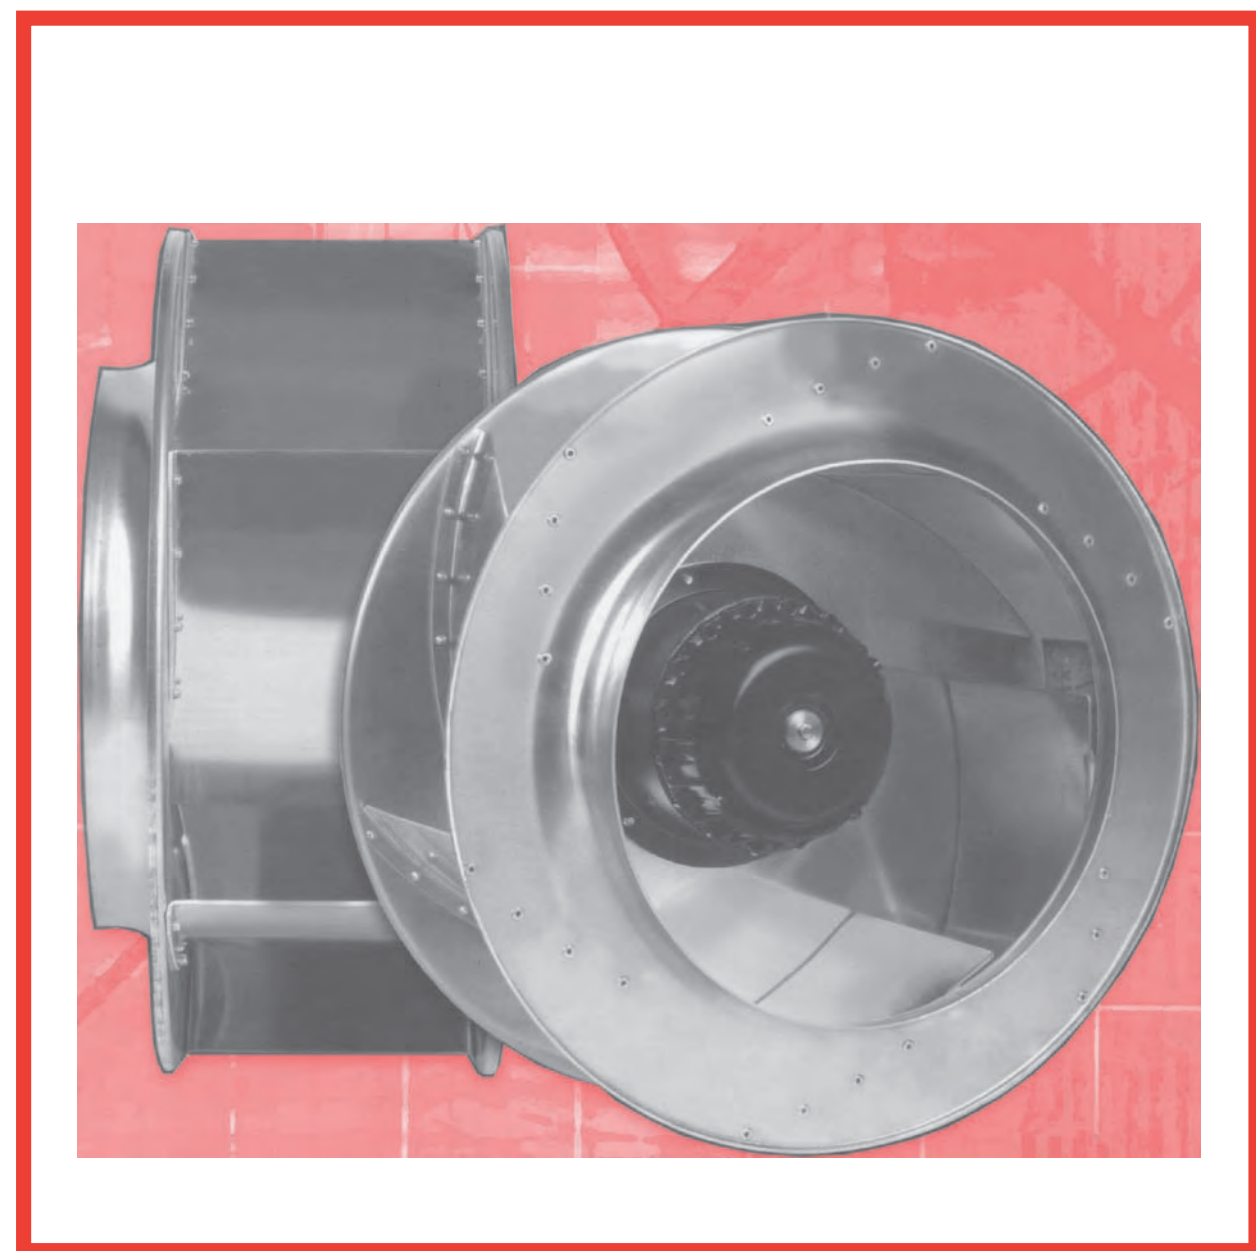

ROTOREX Series