

AIR*Cooled*

Rooftop Packaged Air Conditioners



Dunnair

Quality Engineering Solutions

Dunnair is now firmly positioned as a leading supplier to the air conditioning industry.

The name Dunnair is synonymous with high quality products in the commercial air-conditioning industry. Beginning with Dunn Air Conditioning in 1961 and more recently, Dunnair International and Dunnair Australia, the company continues to be a leading importer and supplier of air-conditioning brands for the Australian market.

In 1994, the company was bought by Multistack and renamed Dunnair International. In 2004, Ernest Ugazio acquired the sales and subsequently state service department of Dunnair. This led to the company being divided into separate entities: Dunnair International and Dunnair Australia, the former focused on Multistack Chiller sales and spare parts; while the latter began design and development of a split ducted and rooftop packaged range that was manufactured in China.

The **Air cool series of the fixed speed rooftop package units** shown in this brochure are part of Dunnair's range of high quality units for every application. Dunnair has also become the first choice when individual engineering solutions are required. Fast-moving and responsive, Dunnair supplies made-to-measure HVAC solutions to a growing number of high profile developments across Australia.

Dunnair research and development plus a strict quality control program have been fundamental to our growth, success and reputation. Dunnair units are manufactured in accordance with strict quality control standards and are MEPS rated and developed for Australian conditions.

Range: Dunnair's two modern factories manufacture 16 separate product lines and some 600 different models. Dunnair can supply most products the HVAC industry requires. This new product line of rooftop package unit is proof that the company is working continuously to improve its product range and the efficiency of its products.

Specialised Solutions: Dunnair will engineer and manufacture equipment to suit the application and building design. No challenge will go unaccepted. We will design and make special products as required for the building, mining, transport and maritime industry. We employ mechanical engineers in all sales offices in Australia. Their role is to supporting designers to achieve their goals.

Our promise to the system designers is: **"Tell us what you need and we will work with you to deliver".**

With a head office in Melbourne, Dunnair has offices in New South Wales, Queensland, South Australia, Western Australia and Tasmania. Dunnair maintains a dedicated engineering and sales support staff waiting to assist you with technical and product information and provide valuable solutions for your project.

Dunnair will design, build and deliver HVAC equipment to meet the stringiest specifications and difficult applications.

"We make special equipment."



Features

- PHS8-PHS35 single stage
- PH40-PH200 two stage
- PHS8-PHS35 direct drive evaporator fan
- PH40-PH200 belt drive evaporator fan
- Automatic De-Ice
- Liquid Accumulator
- Crankcase heater
- 24 volt control
- Galvanised steel panelling
- Durable powder coated cabinet (outdoor unit)
- External stainless steel fittings
- Easy access panels with turn lock handles, no screws
- 25mm insulation
- Coil corrosion protection
- High quality scroll compressors
- High/low pressure protection for compressor
- Time delay protection for compressor
- Limit start timer
- Quiet & efficient
- Individual defrost dual circuit units for two stage units
- Reverse phase protection
- Electric reheat high temperature protection (optional)
- Overload protection for both indoor and outdoor fan motor
- MEPS IV approved
- Manufactured for Australian standards & conditions
- High quality control procedures
- R410a refrigerant is used in standard units
Units with R407c refrigerant are available on request
- Fault output for CBUS DDC control.



Optional Features

As an active market player in commercial air conditioning industry, we understand that every project is unique. Standard manufactured units may not meet the requirements of your system design.

Dunnair always welcome enquiries for custom made air conditioning equipment.

Available options are listed below:

- Two stage for 18–35kw units
- 50mm insulation
- Fan upgrade (High external static pressure)
- Stainless steel drip tray
- Belt drive instead of direct drive fan
- All copper coils (see image*)
- Stainless steel casing (see image*)

- VSD on supply air fan
- Change location of supply return air
- Anti-corrosion marine grade black fin
- Hot gas bypass
- EC plug fan
- 2 speed condenser fan
- High static centrifugal condenser fan for plant room
- Other Customised options available. Please contact with your local Dunnair sale office



Optional Controller

DAT - 770 multifunction thermostat

Technologically advanced in design and performance, the DAT - 770 is the ideal thermostat control for any installation of air conditioning systems

Feature include:

- Auto season change over
- Select programmable or manual mode
- Heat cool or heat pump (O/B) logic
- 0-10v output option for heating or cooling
- High & Low balance points
- Single or 3 speed fan control
- Keyboard and/or temperature locks
- Occupancy sensor inputs
- Programmable occupancy inputs
- Adaptive recovery (Optimised start)
- Smart fan logic for commercial control
- PIN protected menus (installer PIN)
- Outside air temperature display
- 24V powered with memory backup
- Volt free (clean contact) relays
- Large backlit EL display
- Remote temperature sensors available
- Integrated Modbus option
- Replaces almost all 24V thermostats.

Specifications

Models PHS8-PH200

Model	Total Cooling Capacity (kW)	Sensible Cooling Capacity (kW)	Heating Capacity (kW)	Nominal Air Flow (L/S)	Phase	Nominal Max Current (A)	Noise Level (dBA)	Refrigerant Circuits	Fan Drive
PHS8	8.0	7.2	7.9	472	1	15.9	66.8	1	Direct
PHS10	9.3	8.0	9.4	555	1	26.0	67.2	1	Direct
PHS12	11.5	9.7	11.7	695	3	11.0	69.7	1	Direct
PHS15	14.8	13.0	14.6	850	3	12.6	70.6	1	Direct
PHS18	17.1	14.4	17.5	1000	3	14.6	70.4	1	Direct
PHS20	20.5	16.3	20.7	1110	3	17.4	73.5	1	Direct
PHS25	23.8	19.1	24.2	1390	3	22.4	74.9	1	Direct
PHS30	30.6	24.9	30.6	1800	3	27.0	74.7	1	Direct
PHS35	34.8	28.3	34.2	2000	3	28.7	75.2	1	Direct
PH40	39.1	31.5	38.4	2200	3	30.8	68.2	2	Belt
PH45	44.6	36.4	44.2	2700	3	37.2	70.3	2	Belt
PH50	48.6	39.4	47.8	2800	3	41.2	71.3	2	Belt
PH56	55.1	44.5	55.6	3000	3	47.7	72.3	2	Belt
PH66	65.5	50.9	60.7	3500	3	54.5	71.2	2	Belt
PH73	72.8	59.3	66.6	3900	3	60.6	73.0	2	Belt
PH80	80.4	65.5	81.5	4300	3	66.2	75.8	2	Belt
PH85	86.6	68.2	87.1	4500	3	63.2	75.8	2	Belt
PH90	88.5	71.0	85.0	4800	3	74.4	73.6	2	Belt
PH95	95.8	72.3	96.2	5200	3	74.4	76.0	2	Belt
PH100	102.2	82.9	98.5	5500	3	85.2	77.0	2	Belt
PH120	117.6	95.2	116.2	6500	3	98.8	76.0	2	Belt
PH140	137.8	110.6	132.0	7500	3	117.5	80.2	2	Belt
PH160	156.2	127.5	152.5	8500	3	133.9	77.6	2	Belt
PH180	176.8	143.6	169.4	9500	3	153.2	80.8	2	Belt
PH200	201.8	164.3	196.2	10500	3	163.7	83.2	2	Belt

Cooling Capacity is based on DB 27° C, 19° C WB Entering Air Temperature & 35° C Ambient Temperature

Heating Capacity is based on 21° C DB, Entering Air Temperature


Sound Levels are from 1 metre of the outdoor unit

Dimensions

Models PHS8-PH200

Model	Overall size (mm)				Spigot Sizes (mm)	
	Width	Depth	Height	Weight (kg)	Return Air spigot (W x H)	Supply Air spigot (W x H)
PHS8	954	1190	780	198	350 x 637	188 x 270
PHS10	954	1190	780	198	350 x 637	148 x 310
PHS12	1050	1246	845	210	400 x 680	221 x 300
PHS15	1190	1360	865	230	495 x 723	237 x 282
PHS18	1190	1360	865	238	495 x 723	275 x 495
PHS20	1170	1650	865	360	390 x 756	325 x 338
PHS25	1560	1650	860	428	710 x 800	325 x 338
PHS30	1800	1800	1010	500	869 x 950	331 x 455
PHS35	1800	1800	1010	622	900 x 1163	452 x 516
PH40	1850	2200	1305	622	900 x 1163	507 x 507
PH45	1850	2400	1305	632	900 x 1163	507 x 507
PH50	1850	2600	1450	780	900 x 1300	507 x 507
PH56	1850	2600	1450	800	900 x 1300	507 x 507
PH66	2100	2700	1550	850	1080 x 1405	569 x 569
PH73	2130	2800	1550	915	1150 x 1405	569 x 569
PH80	2130	2800	1500	970	1150 x 1405	569 x 569
PH85	2130	2800	1550	970	1150 x 1405	569 x 569
PH90	2130	3100	1950	1140	1100 x 1790	638 x 638
PH95	2130	3100	1950	1140	1100 x 1790	638 x 638
PH100	2050	3934	1850	1700	1550 x 1600	638 x 638
PH120	2050	3934	2000	1860	1550 x 1750	715 x 715
PH140	2050	3934	2000	2120	1550 x 1750	715 x 715
PH160	2050	3934	2000	2120	1600 x 1750	800 x 800
PH180	2150	4334	2350	2570	1650 x 2100	900 x 900
PH200	2150	4334	2350	2570	1750 x 2100	900 x 900

Rooftop Packaged Unit Point Load Chart

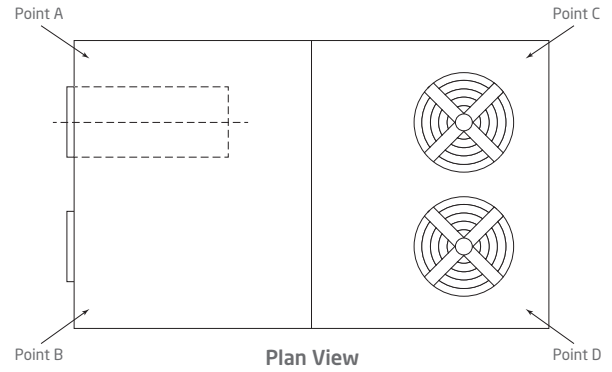


Model	Indoor (kg)		Outdoor (kg)	
	Point A	Point B	Point C	Point D
PHS8	39	39	55	65
PHS10	39	39	55	65
PHS12	40	45	55	70
PHS15	40	50	60	80
PHS18	44	50	60	84
PHS20	70	75	95	120
PHS25	80	98	110	140
PHS30	80	90	150	190
PHS35	80	90	150	208
PH40	120	110	201	201
PH45	120	100	206	206
PH50	165	125	245	245
PH56	175	135	245	245
PH66	175	165	255	255
PH73	195	170	275	275
PH80	195	185	295	295
PH85	195	185	295	295
PH90	265	265	310	310
PH95	265	265	310	310
PH100	395	395	425	485
PH120	435	435	495	495
PH140	485	485	565	555
PH160	485	485	565	555
PH180	550	550	755	730
PH200	535	535	755	755


Fan Curves

Air Handling Performance


PHS8

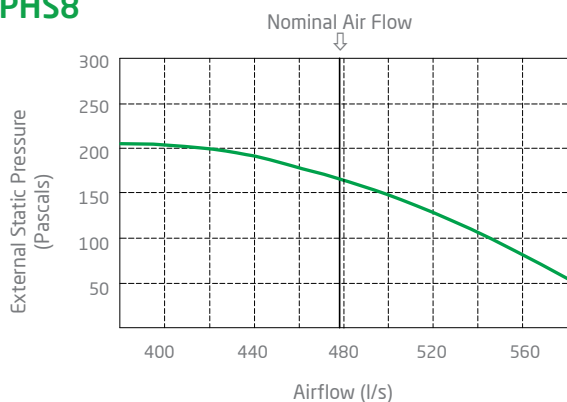


PHS10

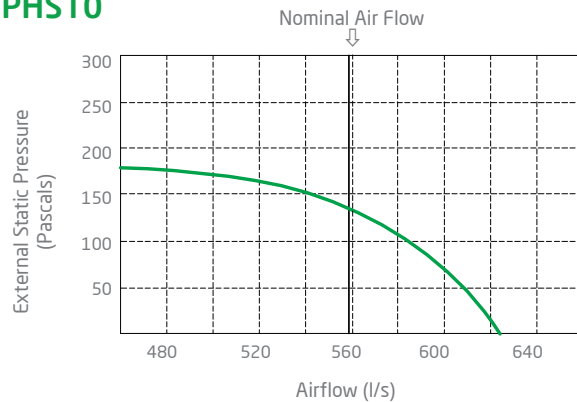


PHS12

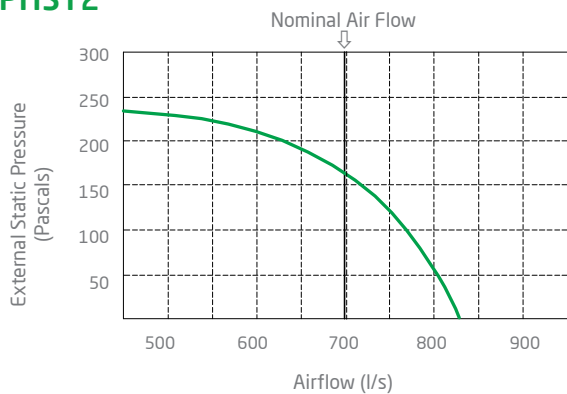


PHS15

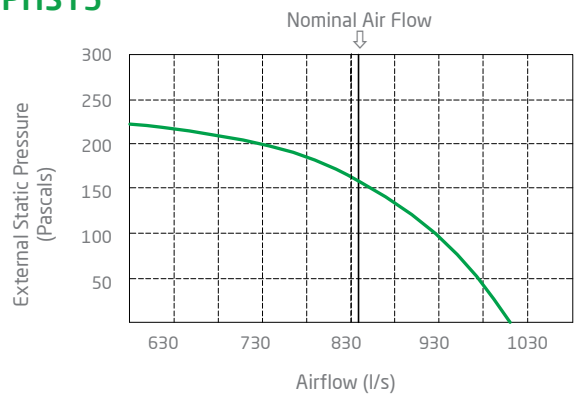

PHS18

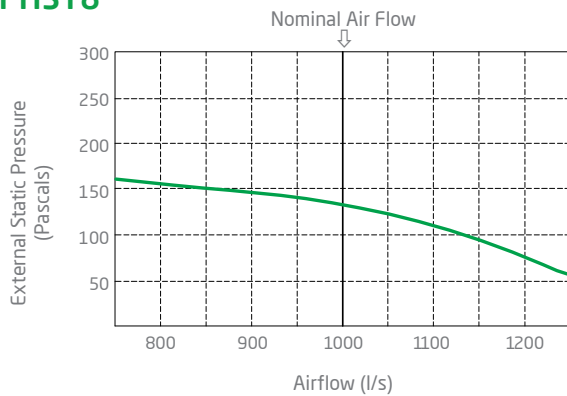


PHS20

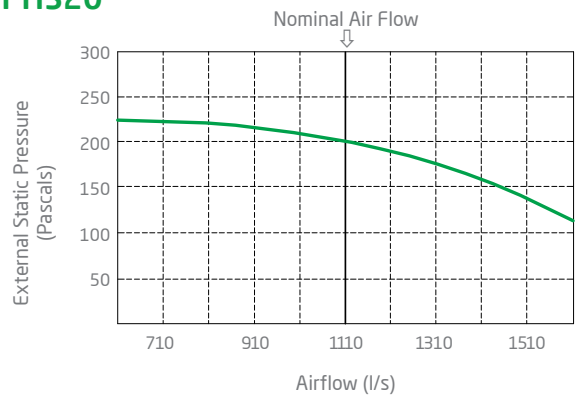


Fan Curves

Air Handling Performance


PHS25

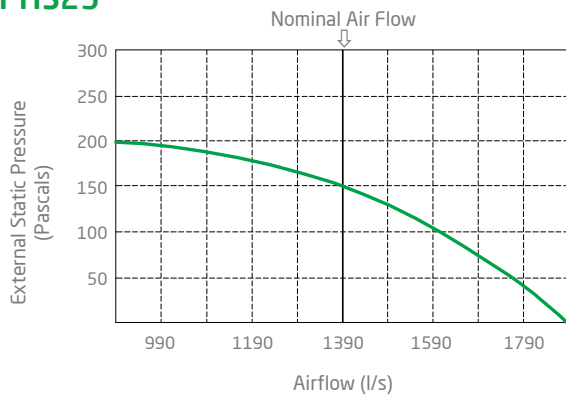


PHS30

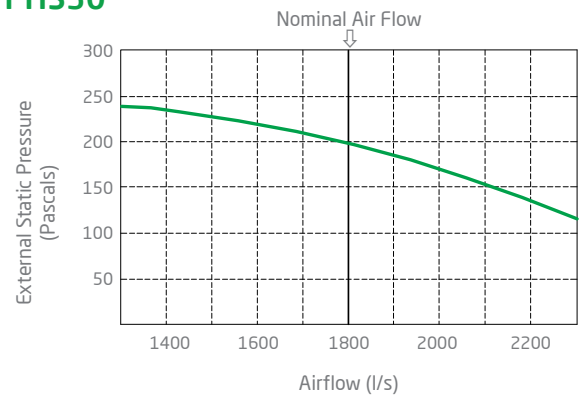


PHS35

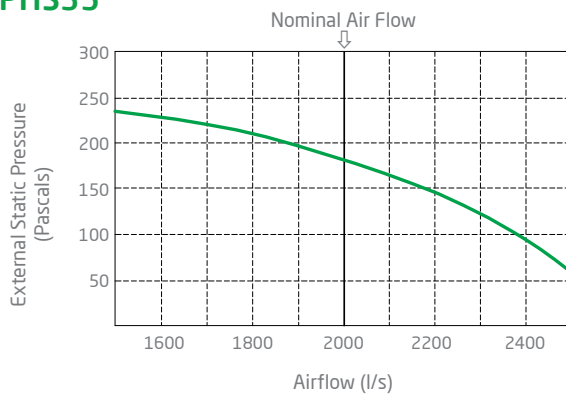


PH40

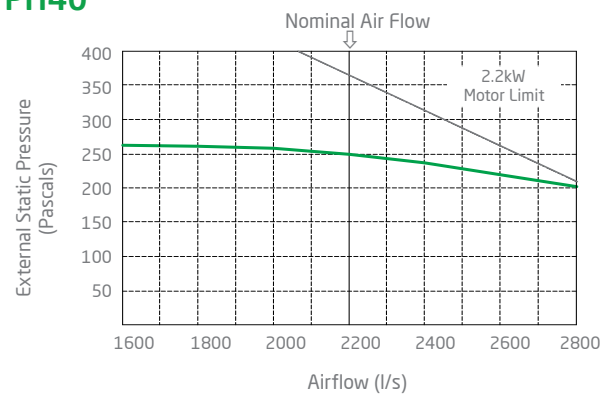

PH45

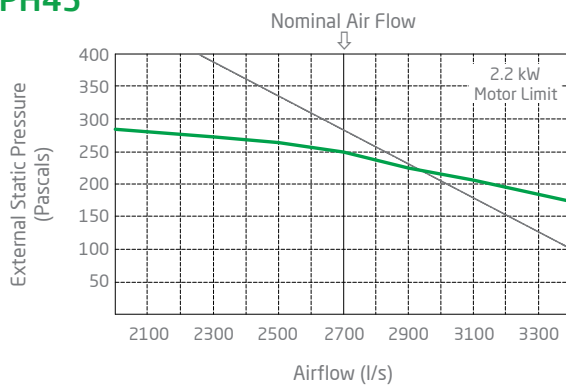


PH50

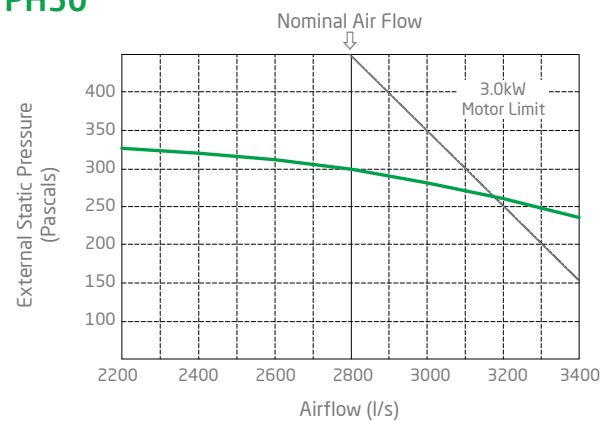


Fan Curves

Air Handling Performance


PH56

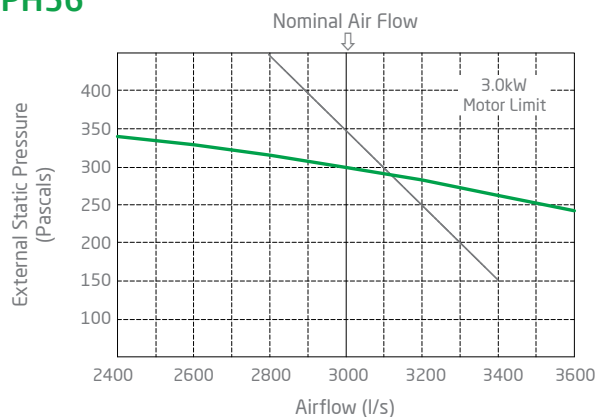


PH66

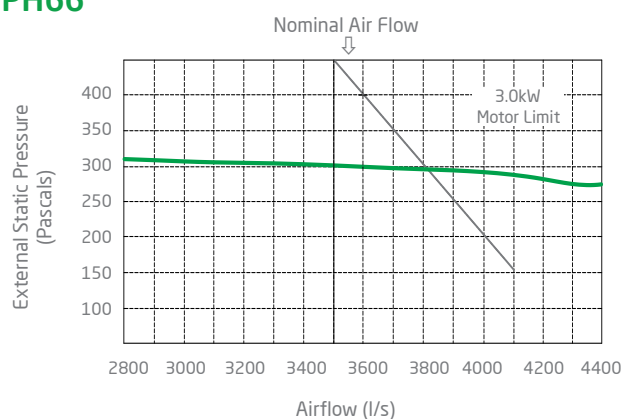


PH73

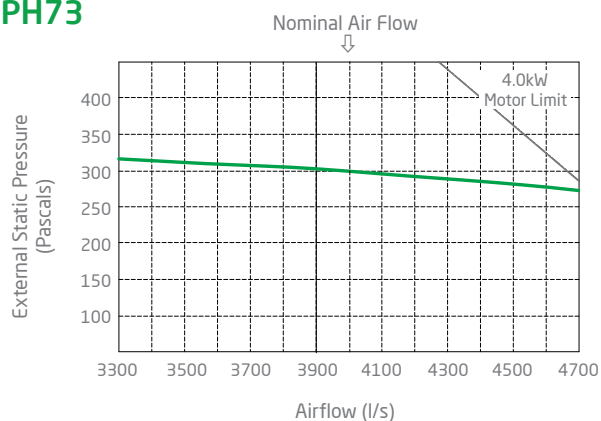


PH80

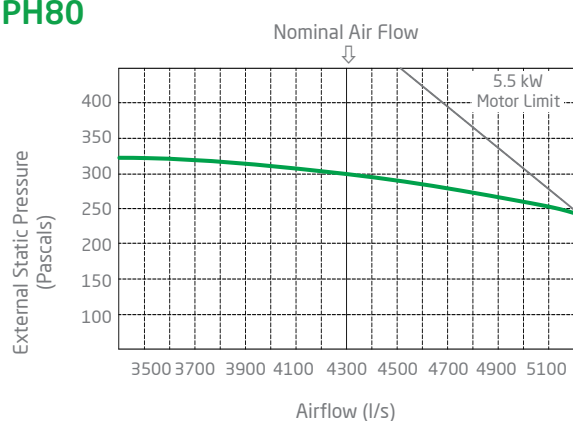


PH85

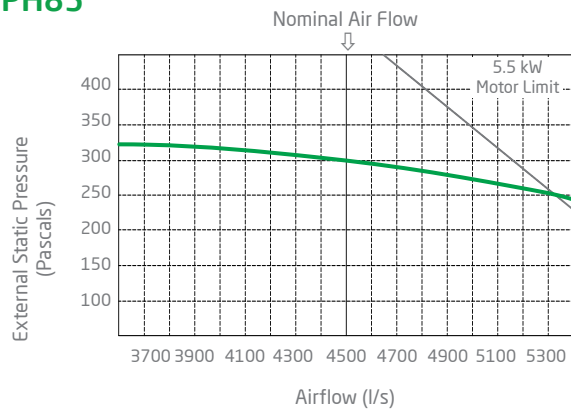


PH90

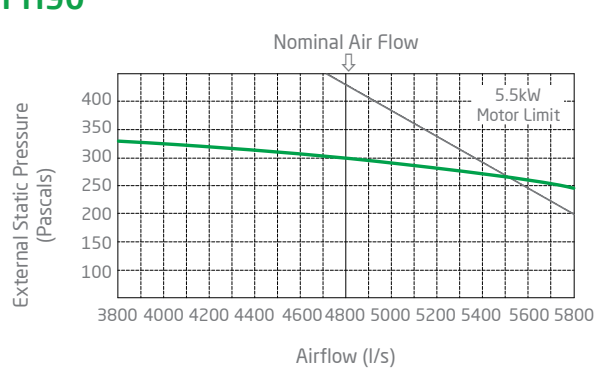


PH95

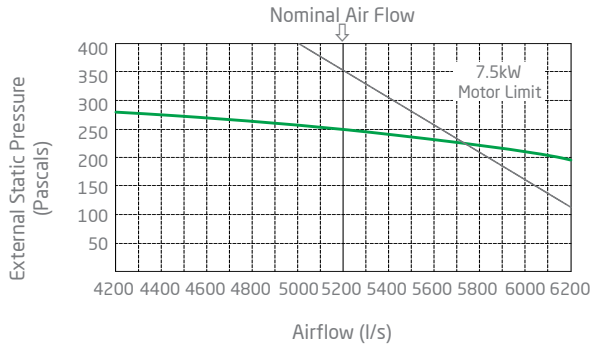


PH100

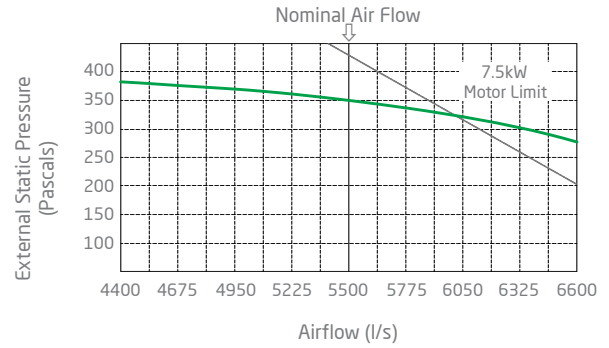


PH120

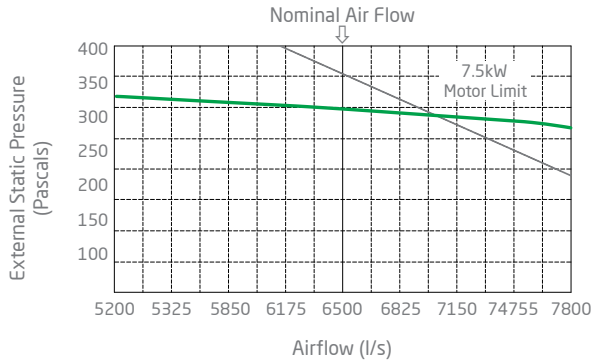


PH140

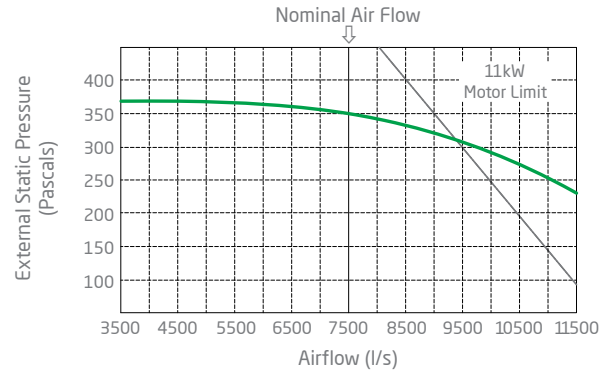


PH160

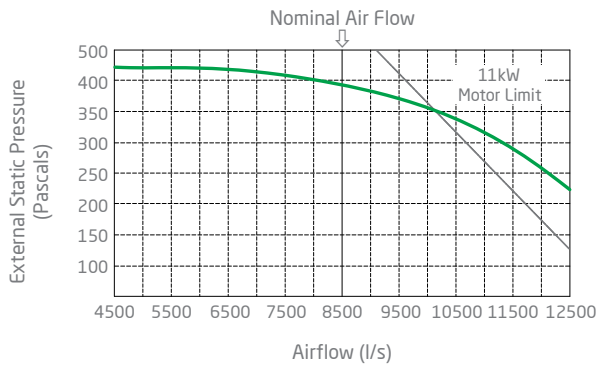

PH180

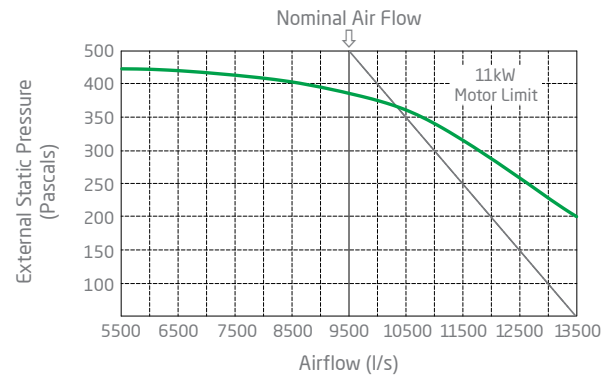


PH200

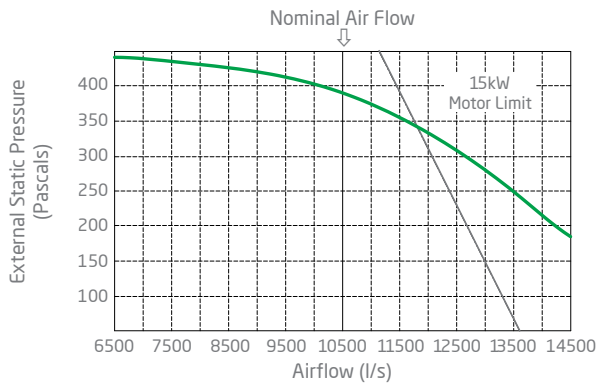

Sound Pressure Curves


PHS8 A Class: 66.8dB*

Frequency (Hz)	Decibel (dB)
64	79.3
125	75.0
250	69.0
500	64.0
1000	62.2
2000	57.6
4000	51.0
8000	43.6

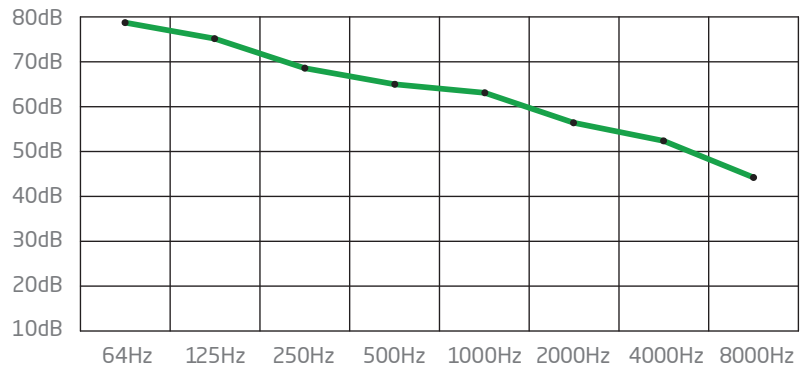


PHS10 A Class: 67.2dB*

Frequency (Hz)	Decibel (dB)
64	76.5
125	72.3
250	69.6
500	66.1
1000	62.6
2000	53.1
4000	48.6
8000	41.8

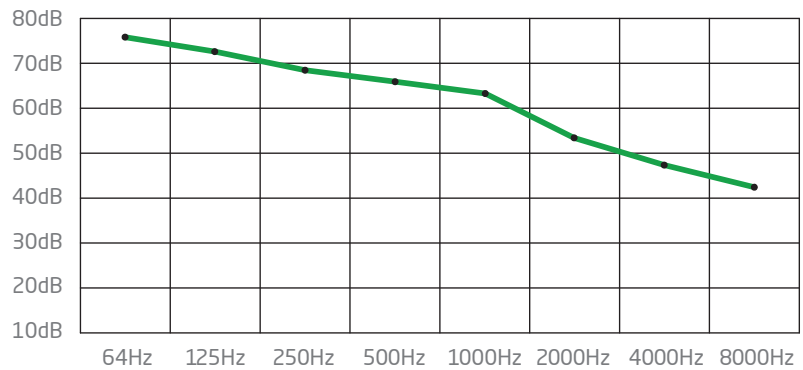


PHS12 A Class: 69.7dB*

Frequency (Hz)	Decibel (dB)
64	76.8
125	71.5
250	69.8
500	70.5
1000	70.6
2000	64.8
4000	58.0
8000	49.3

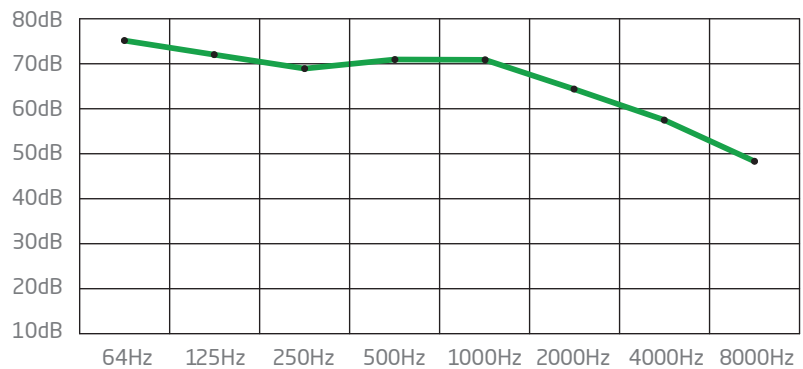

PHS15 A Class: 70.6dB*

Frequency (Hz)	Decibel (dB)
64	76.5
125	72.9
250	68.9
500	67.0
1000	66.7
2000	60.9
4000	55.3
8000	48.0

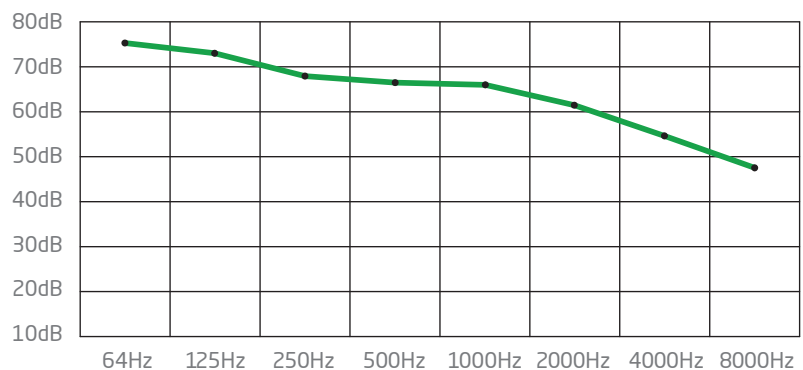


*Occupant at least 1.0m from sound source.

Sound Pressure Curves


PHS18 A Class: 70.4dB*

Frequency (Hz)	Decibel (dB)
64	77.3
125	72.1
250	69.0
500	66.2
1000	65.9
2000	61.1
4000	55.5
8000	47.2

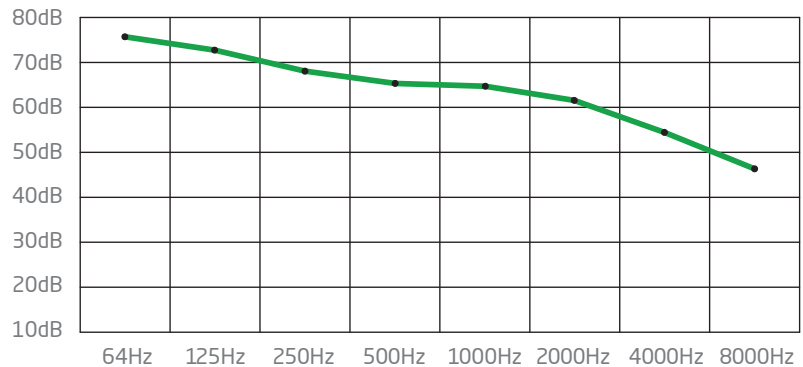


PHS20 A Class: 73.5dB*

Frequency (Hz)	Decibel (dB)
64	77.3
125	74.0
250	72.8
500	73.1
1000	72.5
2000	69.3
4000	59.2
8000	49.3

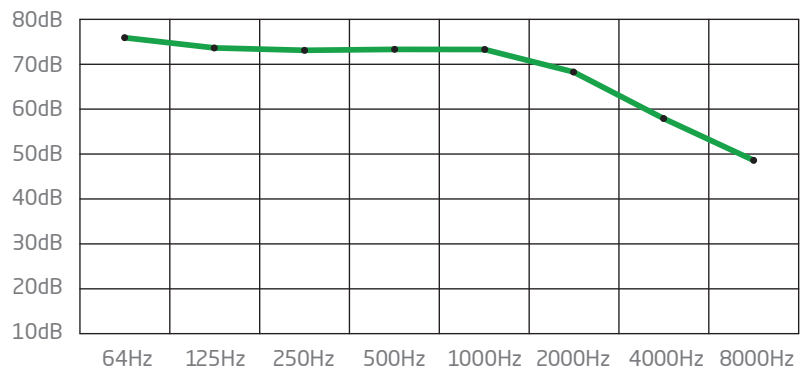


PHS25 A Class: 74.9dB*

Frequency (Hz)	Decibel (dB)
64	78.1
125	74.0
250	73.8
500	73.1
1000	71.5
2000	69.3
4000	58.7
8000	51.9

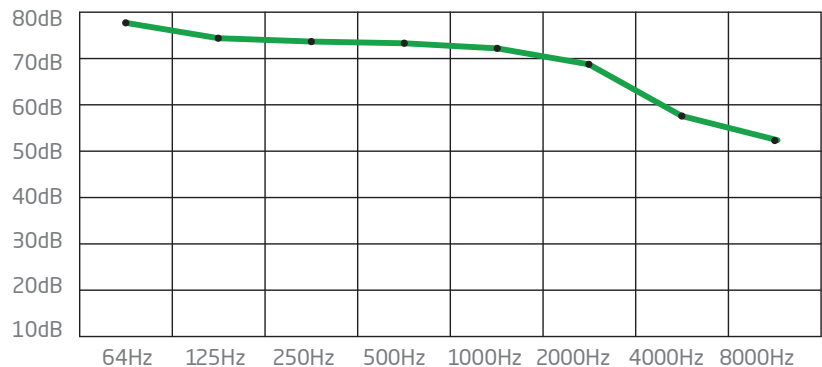

PHS30 A Class: 74.7dB*

Frequency (Hz)	Decibel (dB)
64	77.2
125	71.8
250	71.5
500	72.4
1000	71.0
2000	65.6
4000	59.7
8000	49.8

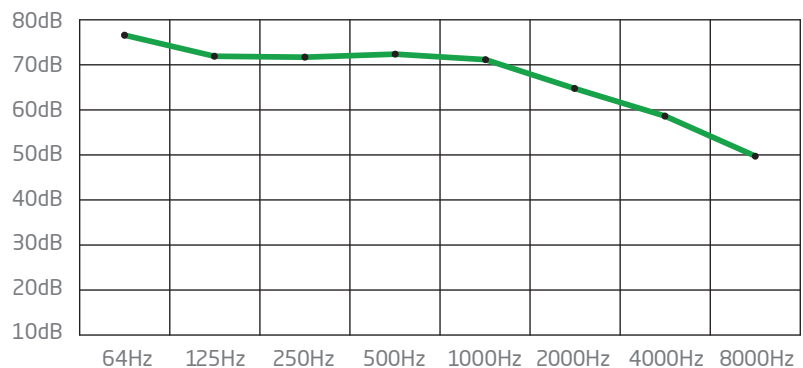


*Occupant at least 1.0m from sound source.

Sound Pressure Curves


PHS35 A Class: 75.2dB*

Frequency (Hz)	Decibel (dB)
64	79.5
125	77.2
250	76.1
500	72.6
1000	70.8
2000	64.8
4000	58.3
8000	52.9

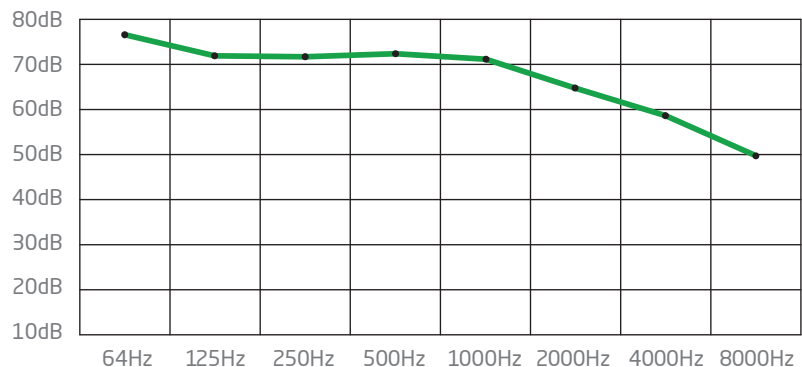


PH40 A Class: 68.2dB*

Frequency (Hz)	Decibel (dB)
64	42
125	58
250	56
500	61
1000	64
2000	62
4000	60
8000	54

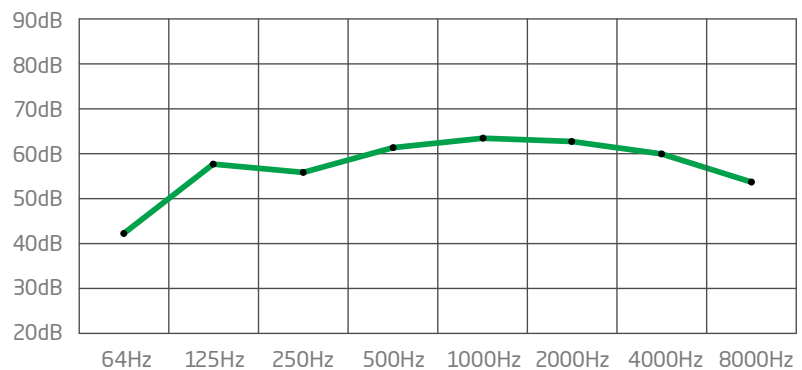


PH45 A Class: 70.3dB*

Frequency (Hz)	Decibel (dB)
64	43
125	58
250	57
500	63
1000	66
2000	64
4000	62
8000	56

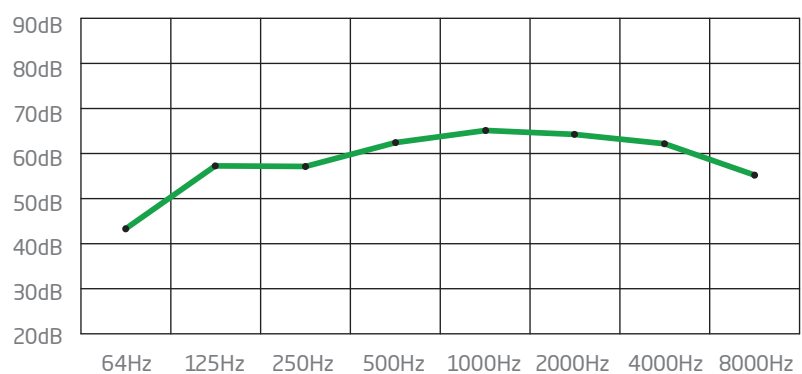

PH50 A Class: 71.3dB*

Frequency (Hz)	Decibel (dB)
64	44
125	59
250	58
500	64
1000	67
2000	65
4000	63
8000	57

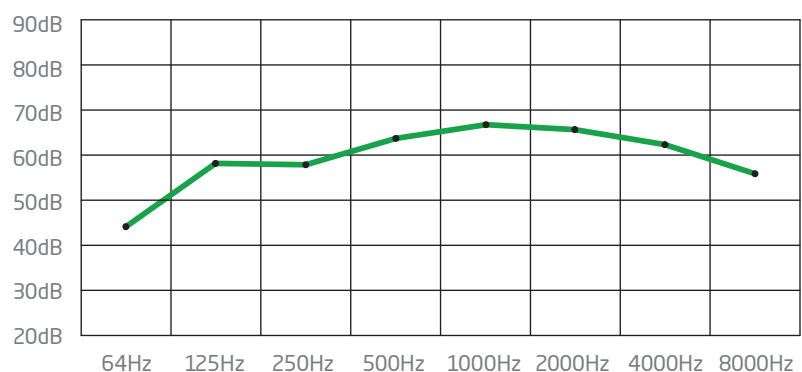


*Occupant at least 1.0m from sound source.

Sound Pressure Curves


PH56 A Class: 72.3dB*

Frequency (Hz)	Decibel (dB)
64	44
125	59
250	58
500	65
1000	68
2000	66
4000	64
8000	58

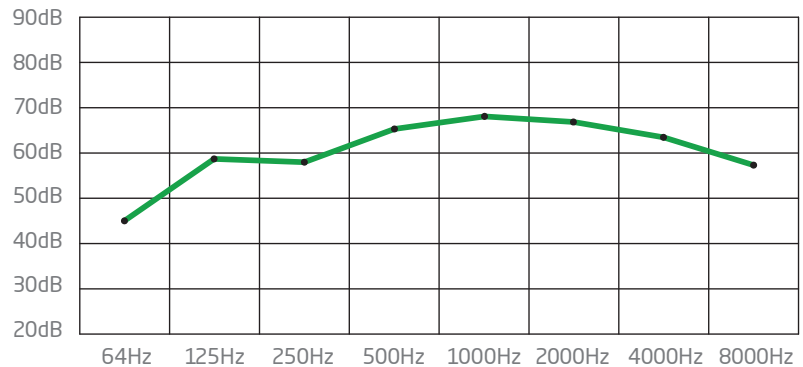


PH66 A Class: 71.2dB*

Frequency (Hz)	Decibel (dB)
64	45
125	56
250	59
500	68
1000	65
2000	65
4000	63
8000	56

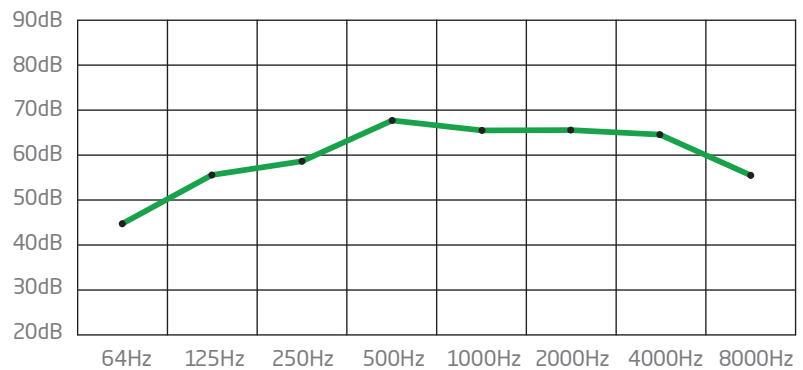


PH73 A Class: 73.0dB*

Frequency (Hz)	Decibel (dB)
64	46
125	57
250	60
500	69
1000	67
2000	67
4000	65
8000	58

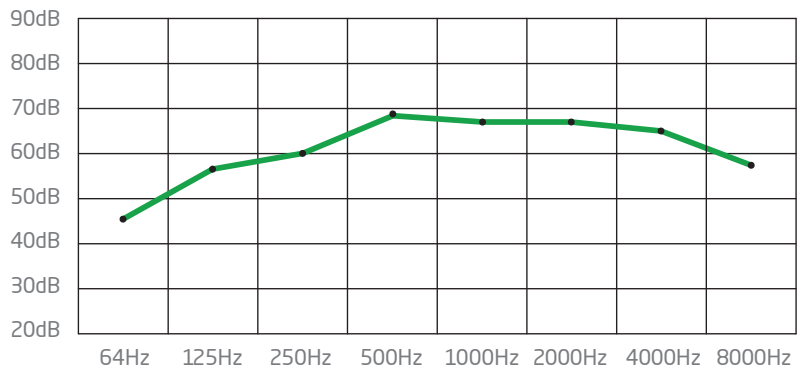

PH80 A Class: 75.8dB*

Frequency (Hz)	Decibel (dB)
64	47
125	59
250	62
500	71
1000	70
2000	70
4000	68
8000	61

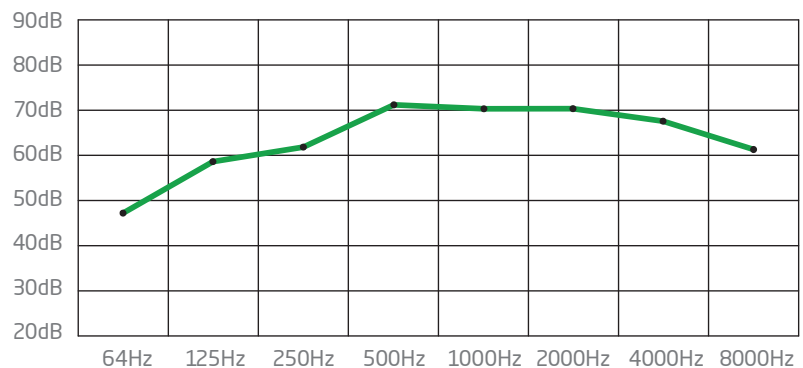


*Occupant at least 1.0m from sound source.

Sound Pressure Curves


PH85 A Class: 75.8dB*

Frequency (Hz)	Decibel (dB)
64	48
125	60
250	63
500	72
1000	71
2000	72
4000	69
8000	62

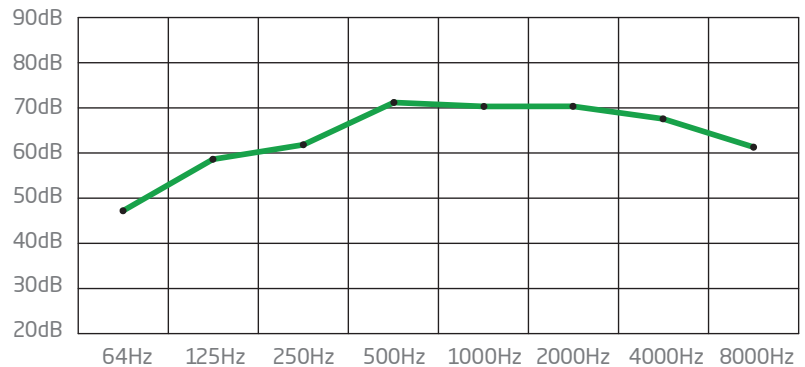


PH90 A Class: 73.6dB*

Frequency (Hz)	Decibel (dB)
64	46
125	58
250	60
500	70
1000	67
2000	68
4000	65
8000	58

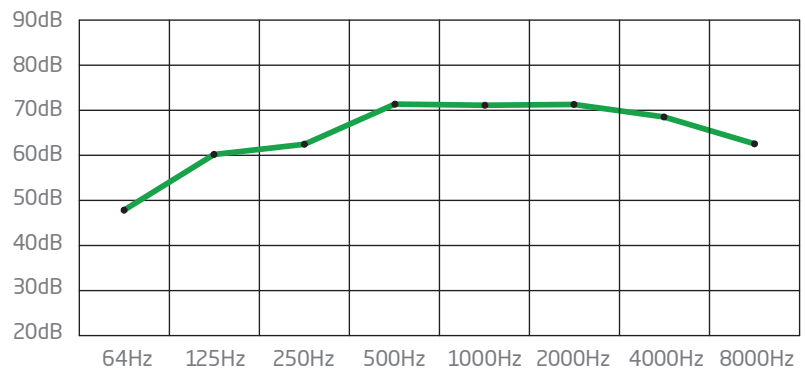


PH95 A Class: 76.0dB*

Frequency (Hz)	Decibel (dB)
64	48
125	59
250	62
500	72
1000	70
2000	70
4000	68
8000	61

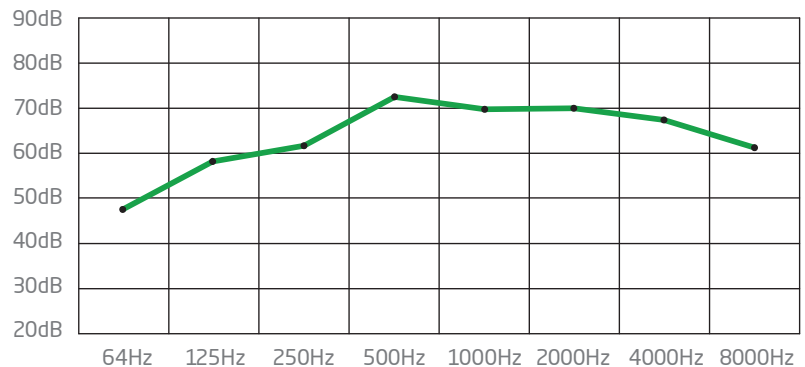

PH100 A Class: 77.0dB*

Frequency (Hz)	Decibel (dB)
64	50
125	61
250	64
500	73
1000	71
2000	71
4000	69
8000	62

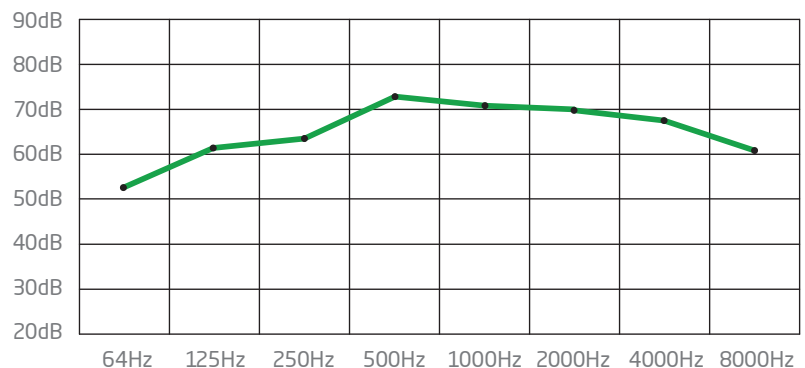


*Occupant at least 1.0m from sound source.

Sound Pressure Curves


PH120 A Class: 76.0dB*

Frequency (Hz)	Decibel (dB)
64	49
125	61
250	63
500	72
1000	70
2000	70
4000	68
8000	61

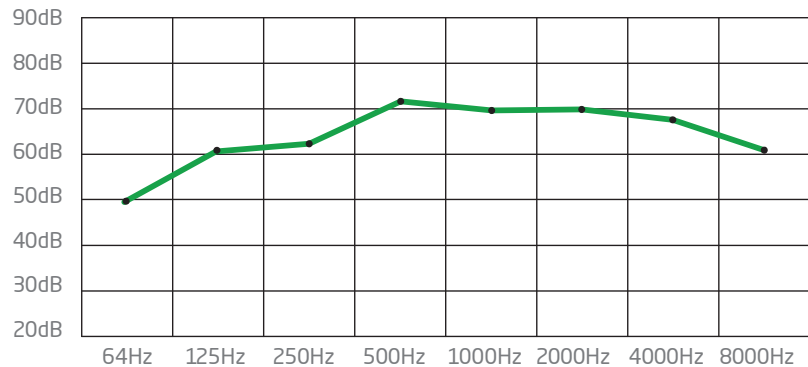


PH140 A Class: 80.2dB*

Frequency (Hz)	Decibel (dB)
64	51
125	63
250	66
500	75
1000	74
2000	75
4000	72
8000	65

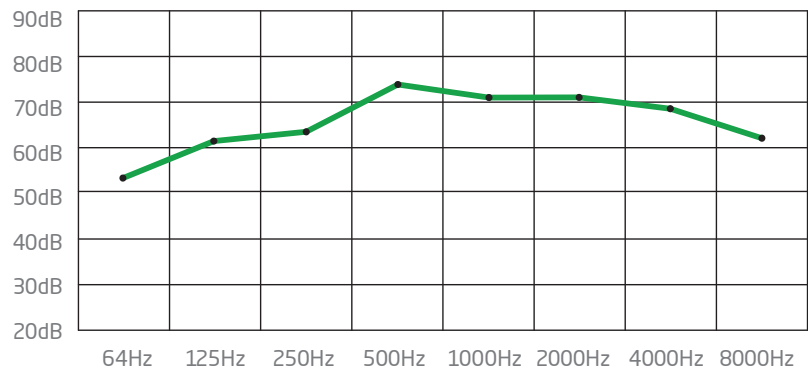


PH160 A Class: 77.6dB*

Frequency (Hz)	Decibel (dB)
64	51
125	62
250	64
500	74
1000	71
2000	72
4000	69
8000	62

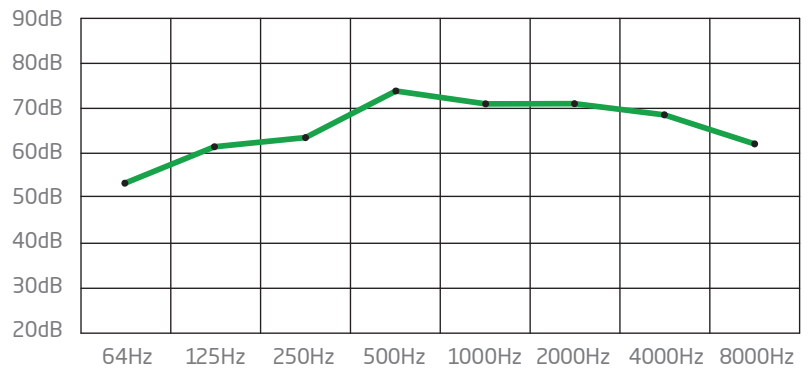

PH180 A Class: 80.8dB*

Frequency (Hz)	Decibel (dB)
64	52
125	64
250	67
500	76
1000	75
2000	75
4000	73
8000	66

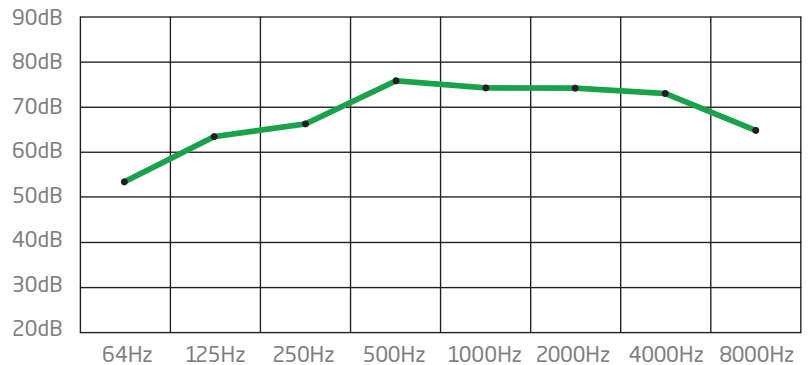


*Occupant at least 1.0m from sound source.

Sound Pressure Curves

PH200

A Class: 83.2dB*

Frequency (Hz)	Decibel (dB)
64	53
125	66
250	68
500	78
1000	77
2000	78
4000	75
8000	68

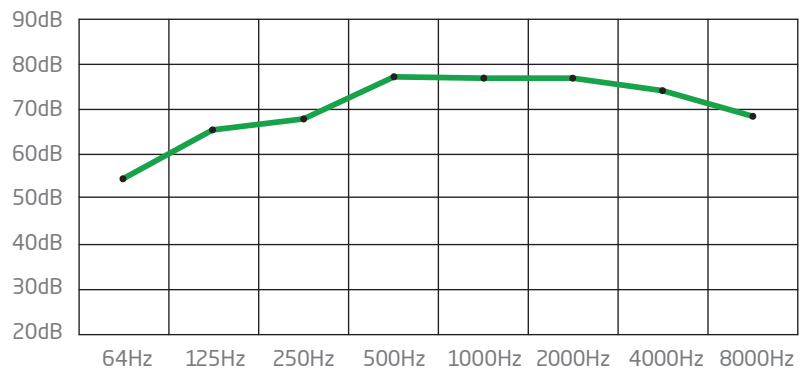


*Occupant at least 1.0m from sound source.

Wiring Diagrams

PHS8-10

1P
240V50HZ

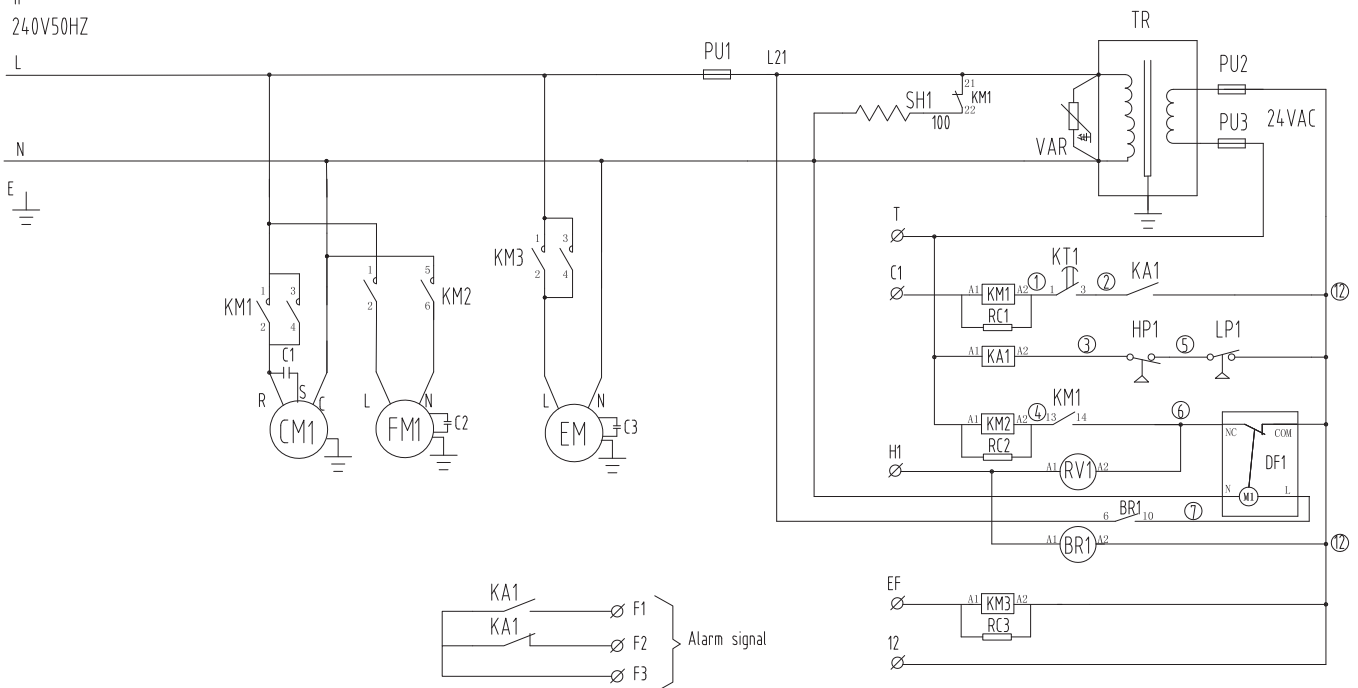


KM1 -3	Contactors	KT1	Time Relay	L/HP1	HP/LP switch	BR1	Bypass Relay
TR	Transformer	C1-3	Capacitor	CM1	Compressor		
PU1/2/3	Fuse	KA1	Fault Relay	FM1	Condenser fan		
DF1	De ice	RC1-3	Filter	EM	Evaporator fan		
VAR	Varistor	RV1	Reversing valve	SH1	Sump heater		

Wiring Diagrams


PHS12-25

Three phase five line
415V 50HZ 3P

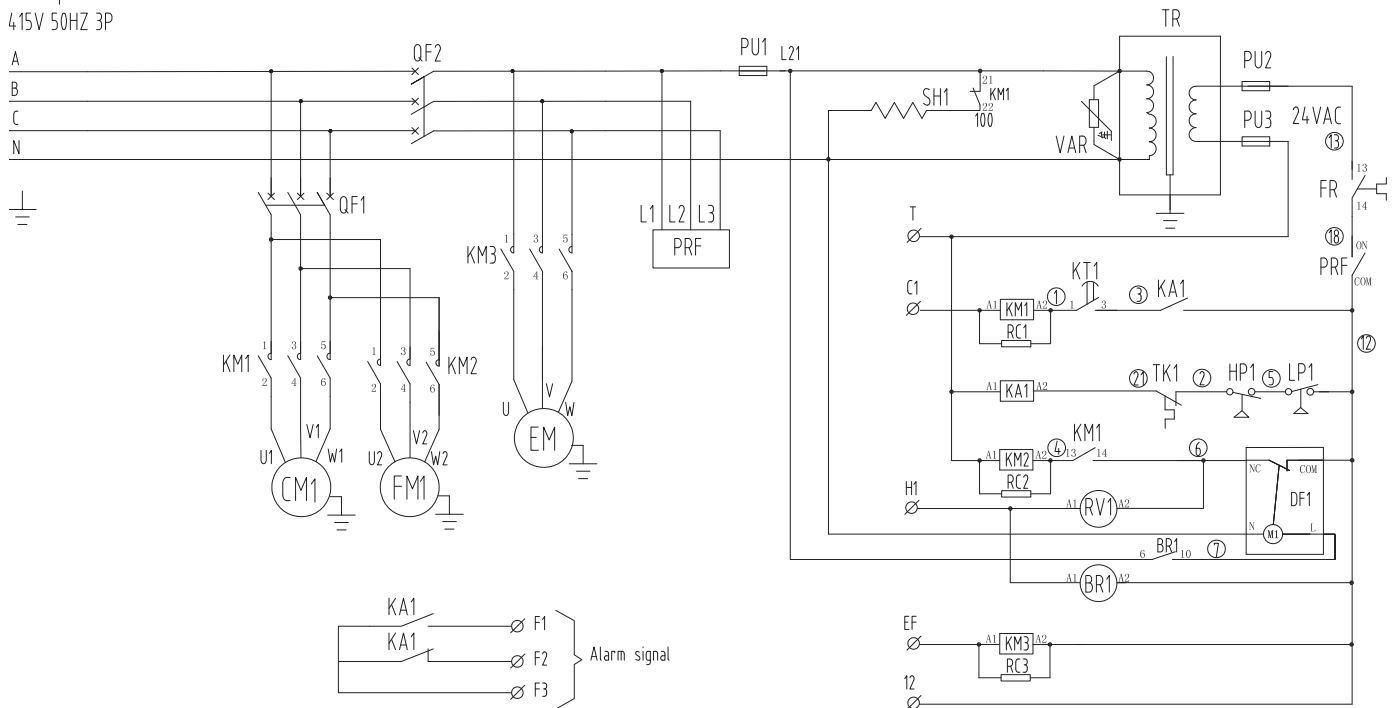

PHS30-35

Three phase five line
415V 50HZ 3P

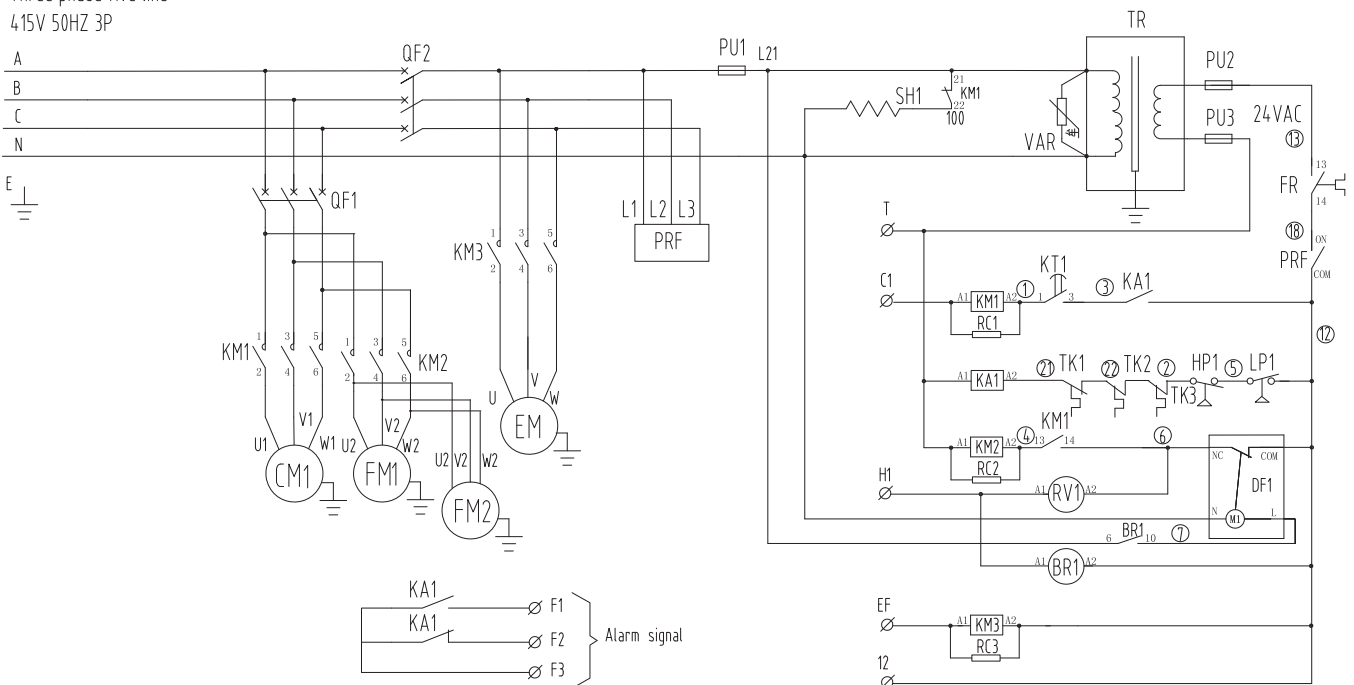

QF1-2 Motor Overload Breaker
KM1-3 Contactor
FR Thermal Relay
TR Transformer
PU1/2/3 Fuse
DF1 De ice


VAR Varistor
KT1 Time Relay
PRF Phase Protection
C1 Capacitor
KA1 Fault Relay
RC1-3 Filter

RV1 Reversing valve
TK1-2 Overload protector
TK3 Disch., temp. sensor
L/HP1-2 HP/LP switch
CM1 Compressor


FM1 Condenser fan
EM Evaporator fan
SH1 Sump heater
BR1 Bypass Relay

Wiring Diagrams

PH40-45

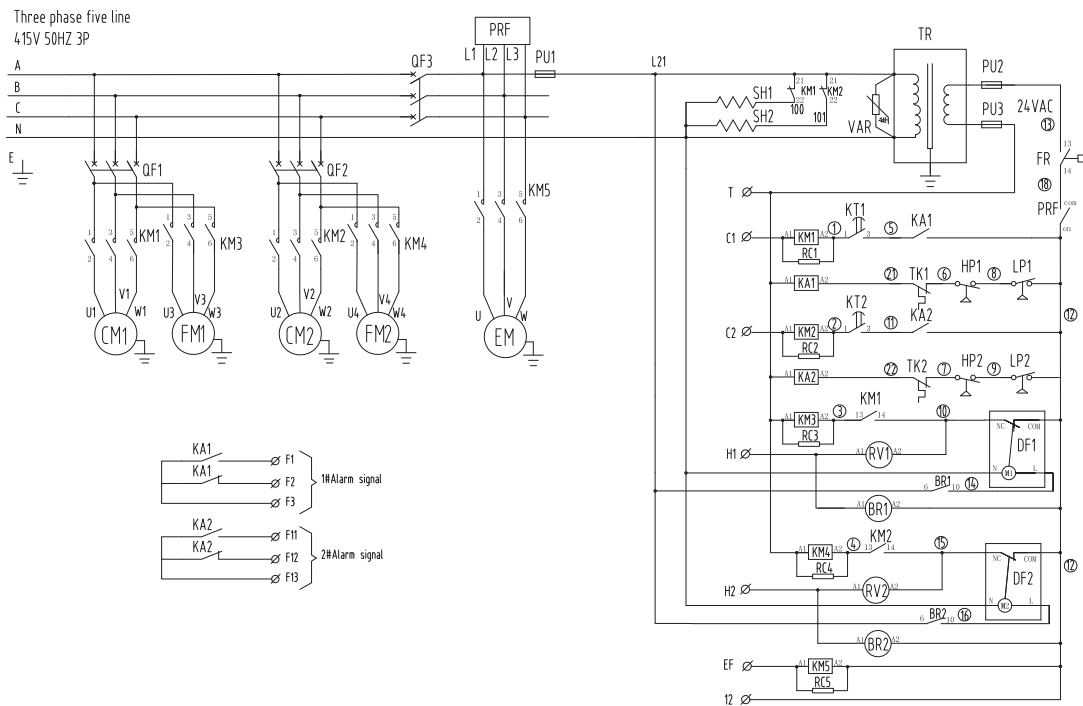

PH50-66

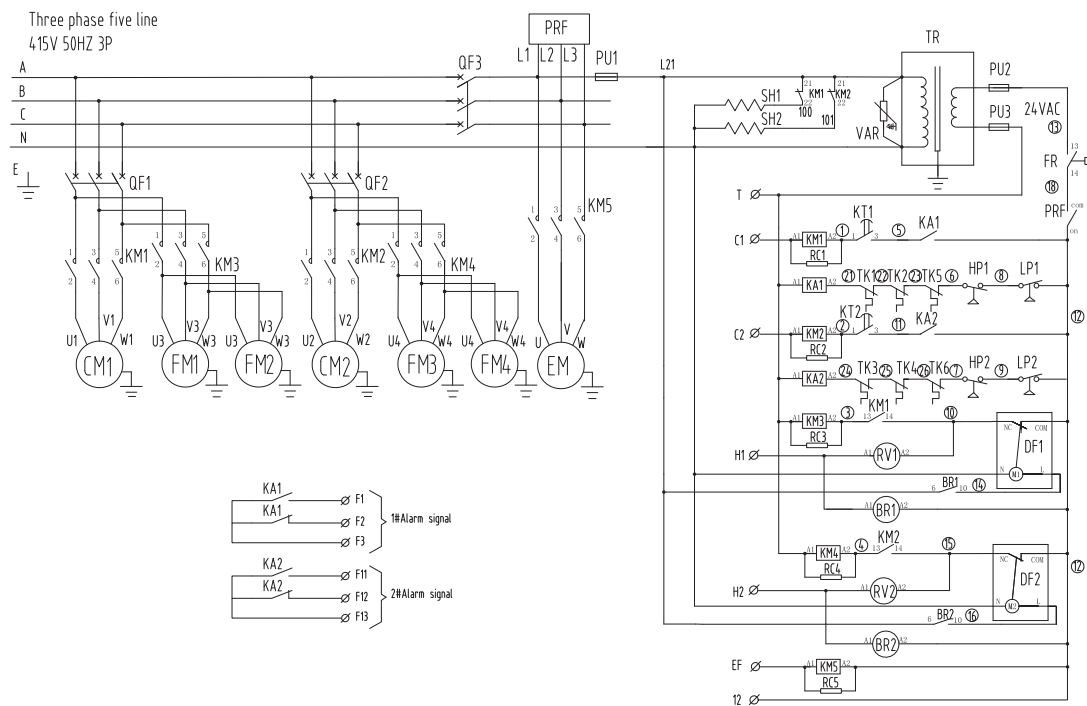


QF1-3	Motor Overload Breaker	VAR	Varistor	RV1/RV2	Reversing valve	EM	Evaporator fan
KM1-5	Contactor	KT1-2	Time Relay	TK1-4	Overload protector	SH1-2	Sump heater
FR	Thermal Relay	PRF	Phase Protection	TK5-6	Disch temp sensor	BR1-2	Bypass Relay
TR	Transformer	C1-3	Capacitor	L/HP1	HP/LP switch		
PU1/2/3	Fuse	KA1-2	Fault Relay	CM1-2	Compressor		
DF1/DF2	De ice	RC1-5	Filter	FM1-4	Condenser fan		

Wiring Diagrams

PH73-95

Three phase five line
415V 50HZ 3P

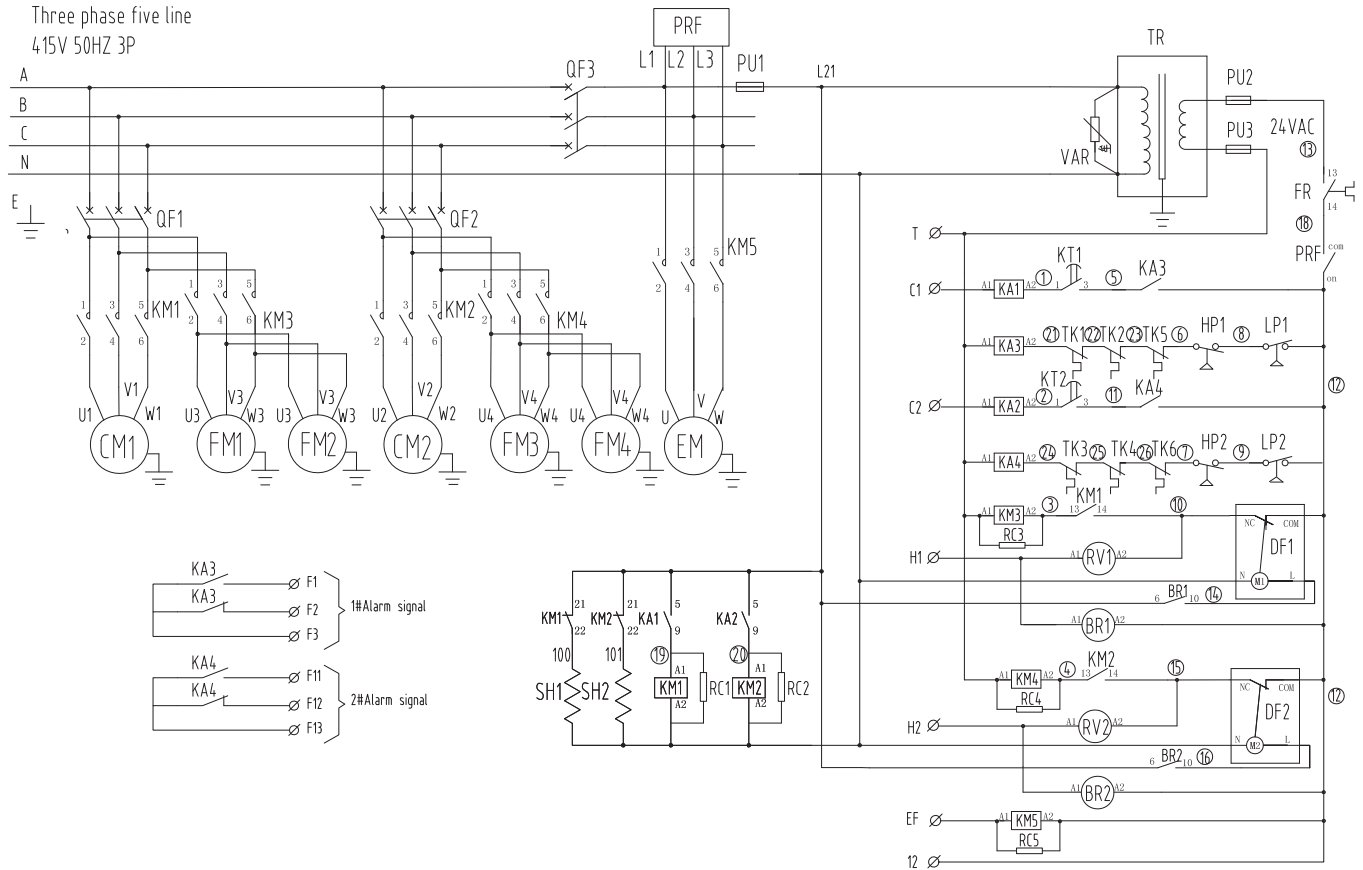


QF1-3 Motor Overload Breaker
KM1-5 Contactor
FR Thermal Relay
TR Transformer
PU1/2/3 Fuse
DF1/DF2 De ice
VAR Varistor
KT1-2 Time Relay
PRF Phase protection
KA1-2 Intermediate relay
KA3-4 Fault Relay

RC1-5 Filter
RV1/RV2 Reversing valve
TK1-4 Overload protector
TK5-6 Disch. temp. sensor
L/HP1-2 HP/LP switch
CM1/CM2 Compressor
FM1-4 Condenser fan
EM Evaporator fan
SH1-2 Sump heater
BR1-2 Bypass Relay

Wiring Diagrams

PH100-120


Three phase five line
415V 50HZ 3P

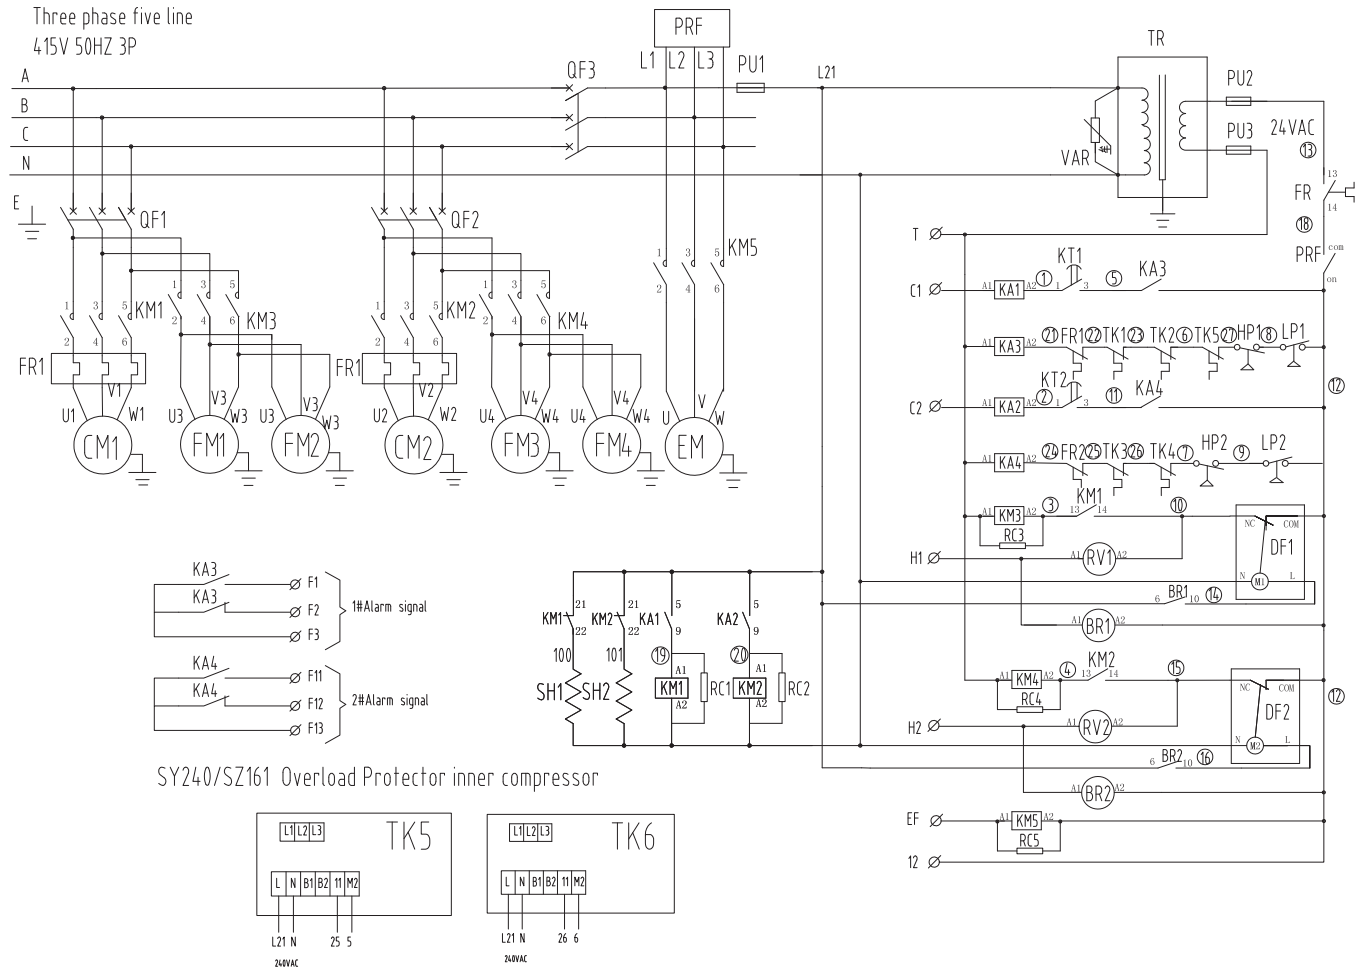

QF1-3	Motor Overload Breaker	RC1-5	Filter
KM1-5	Contactor	RV1/RV2	Reversing valve
FR	Thermal Relay	TK1-4	Overload protector
TR	Transformer	L/HP1-2	HP/LP switch
PU1/2/3	Fuse	CM1 /CM2	Compressor
DF1/DF2	De ice	FM1-4	Condenser fan
VAR	Varistor	EM	Evaporator fan
KT1-2	Time Relay	SH1-2	Sump heater
PRF	Phase Protection	BR1-2	Bypass Relay
KA1-2	Intermediate relay	TK5	Compressor protect
KA3-4	Fault Relay		

Wiring Diagrams

PH140-200

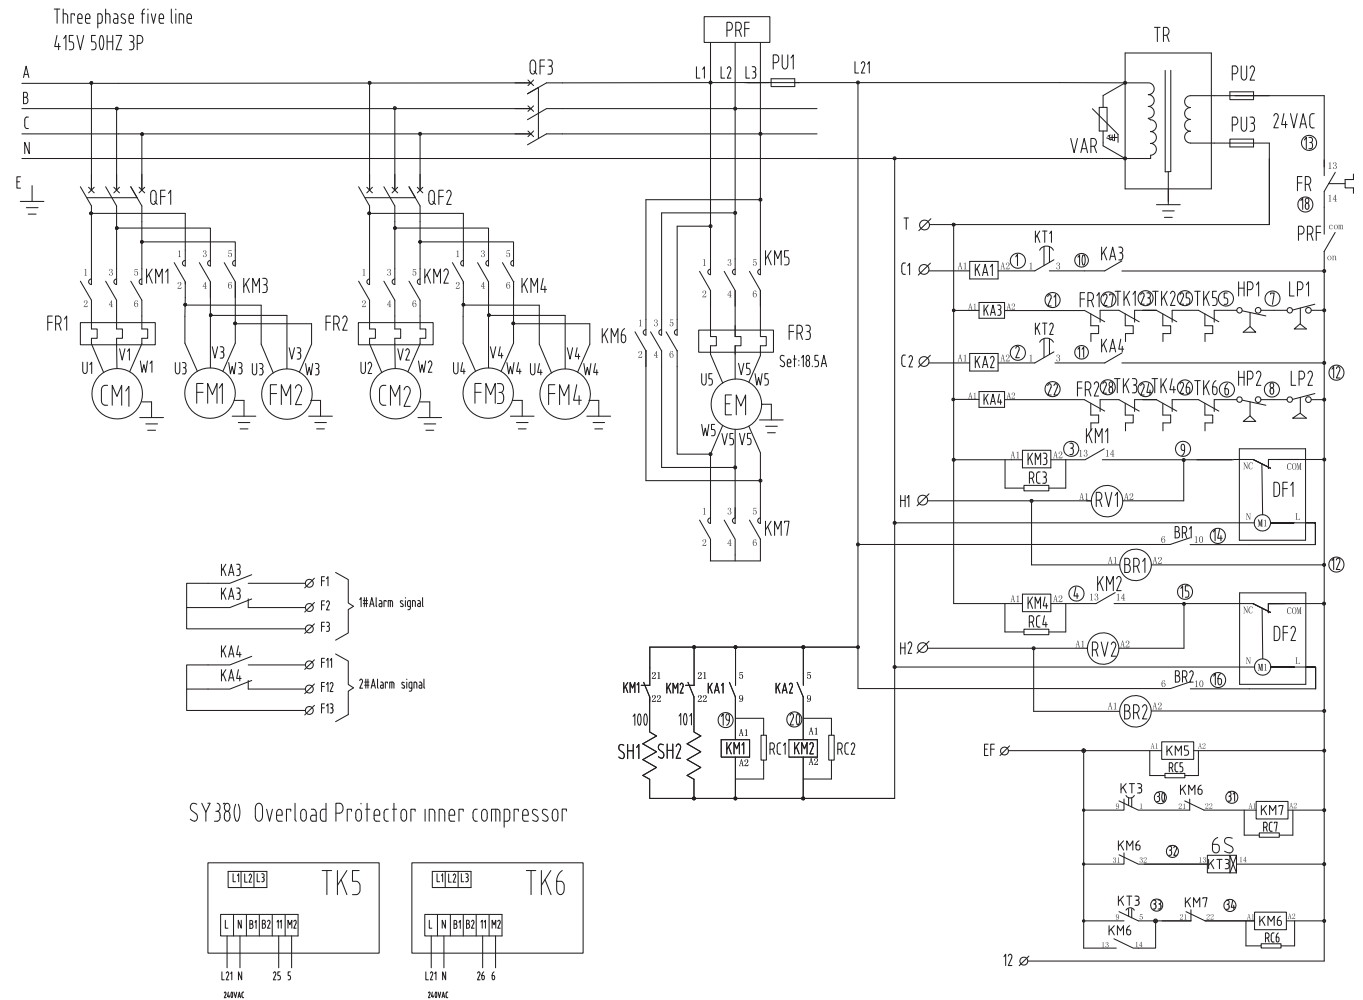



DUNNAIR (Aust) Pty Ltd

Head Office: 140 Bernard Street, Cheltenham VIC 3192

P 03 8586 8200

F 03 8586 8201

E salesaust@dunnair.com.au

W www.dunnair.com.au

Dunnair New South Wales:

P 02 9674 1577

F 02 9674 1588

E salesnsw@dunnair.com.au

Dunnair Victoria:

P 03 9558 7001

F 03 9551 1644

E salesvic@dunnair.com.au

Dunnair SA & NT:

P 08 8240 2888

F 08 8240 2777

E salessa@dunnair.com.au

Dunnair Queensland:

P 07 3890 8796

F 07 3890 8642

E salesqld@dunnair.com.au

Dunnair Western Australia:

P 08 9418 2444

F 08 9418 2100

E saleswa@dunnair.com.au

Dunnair Tasmania:

P 0418 756 643

F 03 6425 3531

E salestas@dunnair.com.au

New Zealand (agent):

P +64 9 582 1012

E salesnz@dunnair.com.au

DUNNAIR OVERSEAS REPRESENTING OFFICES

New Zealand (agent):

P: +64 9 582 1012

E: salesnz@dunnair.com.au

Contact: Mr Rob Morgan

Shanghai:

P: +86 158 8806 3726

E: salesshh-china@dunnair.com.au

Contact: Ms Shelly Xiong

Hong Kong:

P: +852 2575 7080

E: saleshk@dunnair.com.au

Contact: Ms Fanny Leung

Thailand:

P: +66 8 7074 2965

E: salesth@dunnair.com.au

Contact: Mr Giuseppe Di Martino

Guangzhou:

P: +86 139 0238 2104

E: salesgz-china@dunnair.com.au

Contact: Mr Jeff He

Singapore:

Add: 240 Macpherson Road, #05-04/05,

Pines Industrial Building Singapore 348574

E: salessg@dunnair.com.au

Contact: Mr Derek Wong

*Dunnair (Aust) Pty Ltd supports a policy of continuous product improvement.
Therefore specification and designs are subject to change without prior notice.
Dunnair (Aust) Pty Ltd accepts no responsibility for possible errors in catalogues,
brochures and other printed material.*

www.dunnair.com.au