## SUPER FLARE PLUS Flaring Tool

For the reliable and fast production of standard single 45° flares in accordance with EN 14276-2 and JIS B8607:2008 on copper pipes Ø 6 - 18mm and 1/4 - 3/4"

## **Technical Data**

- Guaranteed norm flares\*
- Produces leak free joints
- One-handed quick clamping system
- Automatic depth stop: perfect positioning of the pipe to the flaring cone
  - $^{\star}$  Requirement for norm flare: Preparation of the pipe according to

## **Key Features**

· Automatic depth stop:

Perfect positioning of the pipe everytime Norm-Flare inside industrial standards.

Spring loaded clutch


Defined ending of the flaring process no unwanted deformation of the pipe anymore.

Marking of pipe diameter on dices

The chosen pipe diameter is clearly visible and readable safe and easy operation.

Adapter

SUPER FLARE PLUS Flaring Tool can also be used with a cordless screwdriver.

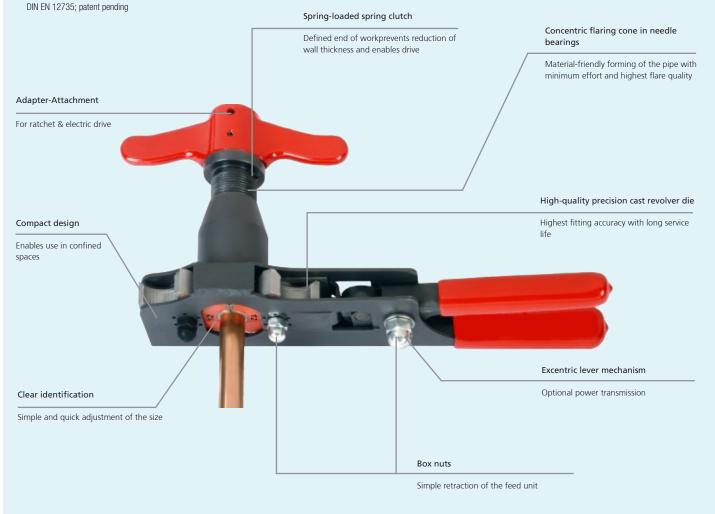



## SUPER FLARE PLUS Flaring Tool (R410A Compliant)

Professional flaring tool that guarantees flare inside industrial standards.

	Part No.	Size
Revolver reeling flaring tool	1000000459	1/4", 5/16", 3/8", 1/2", 5/8", 3/4"

